

► CUMULATIVE RESULTS SUMMARY ..... 1

2011



**DEN Noise Hotline** Policy..... 3



JANUARY - DECEMBER RESULTS ..... 5-9

JANUARY 1, 2011 THROUGH DECEMBER 31, 2011



### Cumulative Results for the Period January 1, 2011 through December 31, 2011

The number of potential Class II NEPS violations registered between January 1 through December 31, 2011 was one. There was one potential Class II NEPS violation during the same period the previous year. Please see pages 4 and 6 for Denver International Airport (DEN) NEPS information. There was no potential 65 DNL noise contour violation for either time period, as the 65 DNL contour continued to be completely contained within the boundaries of the City and County of Denver (CCD). Please see page 5 for DEN contour map.

The number of households registering at least one complaint increased only slightly from the year before from 51 in 2010 to 52 in 2011. Five households registered a combined 87.5 percent of total complaints in 2011. The number of complaints decreased by 27 complaints during 2011 as compared to the same period in 2010 (2,293 vs. 2,320 in 2010).

The percentage of complaints increased in 2011 for nighttime aircraft operations (10 p.m. to 7 a.m.) to 13.5 percent of total complaints received compared to 12.3 percent in 2010. Please see pages 7 and 8 for complete complaint and operational data.

To access the DEN Noise Report for the first three quarters of 2011, please go to: http://business.flydenver.com/community/noise/index.asp.



## **DEN Airport Noise and Operations Monitoring System**



Remote Monitoring Terminal (RMT) with a weather collecting station.

The DEN Airport Noise and Operations Monitoring System (ANOMS) is a state-of-the-art computer system designed to enable the City and County of Denver to monitor aircraft noise in the vicinity of the airport. In addition to monitoring noise levels, the system calculates Noise Exposure Performance Standards (NEPS) at 101 grid points in Adams County (see map on page 4 for NEPS locations).

The DEN ANOMS system monitors noise levels at 27 permanent and four portable noise monitoring terminals. These terminals are located throughout the Denver metro area (see map on page 4 for RMT locations).


The state of the s

The system also records the movement of all aircraft in the vicinity of DEN by utilizing FAA air traffic control radar data. This makes it possible to match actual flights with noise events.

#### **ARTSMAP**

ARTSMAP is a specially designed noise modeling program that automatically creates noise contours. ARTSMAP is designed to create contours from actual radar flight tracks that DEN receives from the FAA ARTS system which is sent via modem, eliminating the need for manual data manipulation. The ARTSMAP software is installed on a computer in the DEN Noise Abatement Office. The program analyzes, views, reports, and stores the data.

Currently, ARTSMAP is used at several major airports nationally. It allows the DEN Noise Abatement Office to perform noise data analysis, generate daily automated noise contours, receive detailed runway utilization and perform identification for airline fleet mix.



ARTSMAP Output

### Land Use and Zoning

Urban growth and development in the areas surrounding DEN, particularly non-compatible residential and other noise-sensitive land uses, is of utmost concern to the City and County of Denver.



The DEN Noise Abatement Office has developed noise contours surrounding the airport, inside which certain types of land uses are not recommended. The 65 Ldn noise contour (average decibel level with a 10 decibel penalty applied to nighttime operations) is a line inside which, under Federal guidelines, no residential development should occur.

The operational 65 Ldn noise contour for the airport, as created by ARTSMAP, is included in this report. However, for DEN, the 60 Ldn noise contour is used for compatible land use planning by the surrounding jurisdictions, in accordance with

guidelines promulgated by the Denver Regional Council of Governments and the Denver/Adams County Intergovernmental Agreement. Additional mapping for DEN that includes the applicable noise contours is available upon request.

## **DEN Noise Hotline Policy**

The purpose of the DEN Noise Complaint Hotline is to provide an opportunity for individuals to express their concerns regarding noise generated by aircraft operating at DEN. Citizens are asked to leave their name, address, and the date and time of their complaint on the hotline. Complaints are downloaded daily by our Noise Officers and then transcribed into the ANOMS system, where specific complaints can be matched to individual flight tracks. It is essential for all information to be entered correctly in order for the system to be effective.







Profanity will not be tolerated, and will result in the complaint not being registered. Any attempt to deliberately

tie-up or abuse the Hotline may result in police action. Phone harassment is a state criminal offense and can carry a jail sentence and/or fine. Threats involving aircraft and/or the airport are a very serious matter and are a federal criminal offense. To make a threat, even jokingly, will result in a notification to the Denver Police Department and may involve an FBI investigation.

## **Glossary of Terms**

**Sound:** A rapid variation in air pressure, which is perceived by the ear and brain as sound.

Noise: Generally considered to be any sound, which is deemed undesirable by an individual.

<u>Decibel</u>: Sound is measured by its pressure or energy in terms of decibels. The decibel scale is logarithmic; when the decibel level increases by 6 dB, the measured sound is twice as loud.

Noise Abatement: A measure or action that minimizes the amount or impact of noise on the environs of an airport. Noise abatement measures include aircraft operating procedures and use or disuse of certain runways or flight tracks. These operating procedures are controlled by the FAA.

A-weighted Sound Level (dBA): A type of sound level measurement which reduces the effect of very high and very low frequencies in order to mimic the response of the human ear. Nearly all aircraft sound level measurement is conducted using A-weighting.

Equivalent Continuous Sound Level (Leq): A measurement of the average sound energy experienced over a period of time. This average sound level is expressed in decibels, and includes a notation of the period of time, which it covers (such as Leq (24) for an average of the sound level over a 24-hour period).


Day Night Level (Ldn): Also referred to as DNL. Similar to a Leq measurement, but is conducted over at least a 24-hour time span and includes a 10dB nighttime penalty. For an Ldn calculation, all noise that occurs at night (defined as 10 p.m. to 7 a.m.) is artificially increased for the public's increased sensitivity to noise during these hours.

Noise Contour: A line surrounding an airport that encloses a geographic region, which is exposed to a particular Ldn level. These contour lines are nested in such a way that contours closer to the airport generally surround areas that experience higher noise levels than contours farther out. Annual Ldn contours are used to determine whether certain types of zoning or land uses are compatible with particular annual Ldn noise levels. 65 Ldn is considered by many federal agencies to be the level at which residential land use becomes incompatible.


Remote Monitoring Terminal (RMT): Consists of a noise level analyzer, a weatherproof microphone, a system controller, a power supply, and a dedicated telephone line to download noise data to the ANOMS system, all mounted in a weatherproof cabinet.





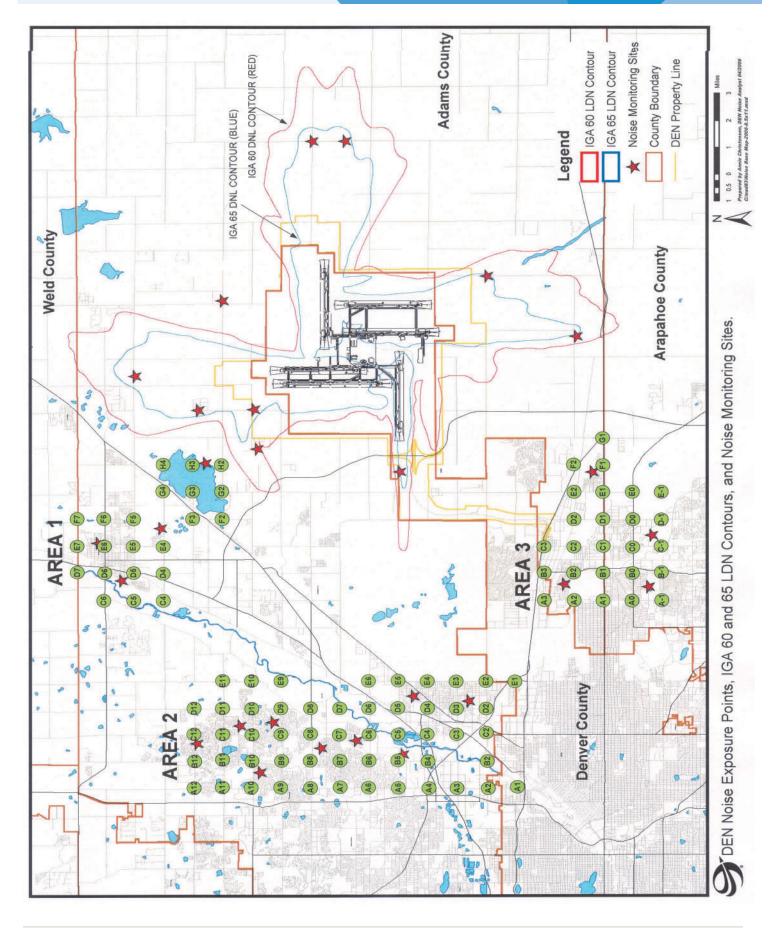

## **DEN 65 LDN Contour**

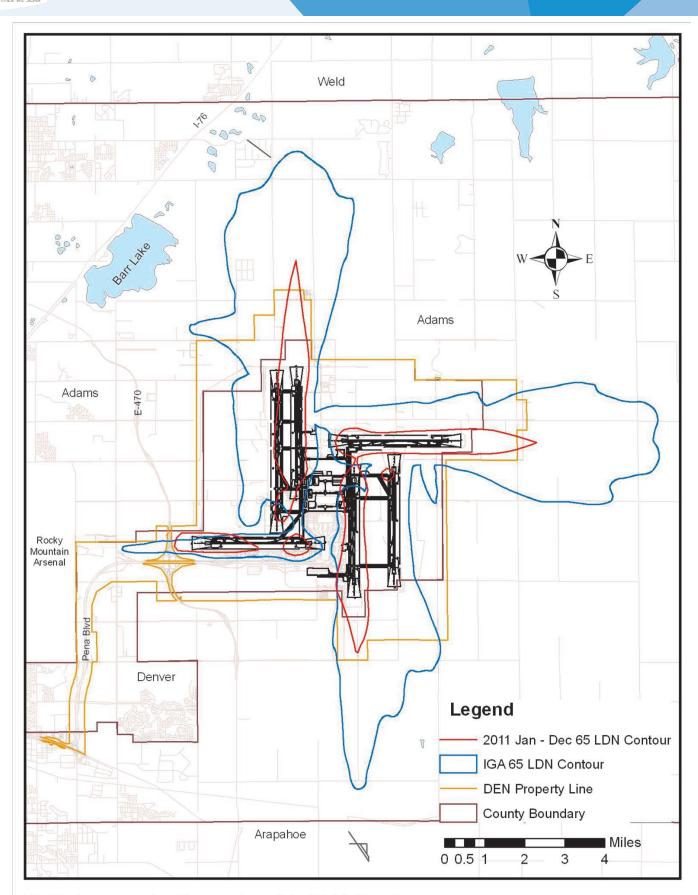

DEN January 1 - December 31, 2011 Contour

## **DEN / Adams County IGA NEPS Values**

Area 2										
January 1 through December 31, 2011										
Grid	IGA Annual	Calculated	Difference							
Points	Leq (24)	Leq (24)	Leq							
A,1	38.6	37.0	-1.6							
A,2	37.6	37.8	0.2							
A,3	42.3	38.6	-3.7							
A,4	45.3	39.1	-6.2							
A,5	43.9	39.1	-4.8							
A,6	37.5	36.7	-0.8							
A,7	37.7	36.5	-1.2							
A,8	36.5	37.9	1.4							
A,9	36.3	39.0	2.7							
A,10	37.6	38.1	0.5							
A,11	39.2	36.4	-2.8							
A,12	41.2	35.2	-6.0							
B,2	39.5	38.2	-1.3							
B,4	42.5	40.0	-2.5							
B,5	43.1	40.2	-2.9							
B,6	39.0	37.5	-1.5							
B,7	39.0	37.5	-1.5							
B,8	38.0	39.3	1.3							
B,9	38.3	40.1	1.8							
B,10	39.0	38.7	-0.3							
B,11	40.4	36.8	-3.6							
B,12	42.6	35.9	-6.7							
C,2	41.0	38.9	-2.1							
C,3	43.3	39.5	-3.8							
C,4	43.5	40.9	-2.6							
C,5	43.4	41.5	-1.9							
C,6	43.3	38.4	-4.9							
C,7	43.3	38.5	-4.8							
C,8	42.6	40.6	-2.0							
C,9	42.2	41.0	-1.2							
C,10	41.6	38.9	-2.7							
C,11	42.5	36.8	-5.7							
C,12	44.3	36.0	-8.3							
D,2	41.7	39.8	-1.9							
D,3	46.2	40.0	-6.2							
D,4	48.4	41.7	-6.7							
D,5	48.2	42.8	-5.4							
D,6	46.2	39.3	-6.9							
D,7	44.2	39.7	-4.5							
D,8	43.7	42.1	-1.6							
D,9	43.1	41.4	-1.7							
D,10	44.9	38.4	-6.5							
D,11	44.5	36.5	-8.0							
D,12	45.1	35.7	-9.4							
E,1	42.4	39.4	-3.0							
E,2	42.2	40.9	-1.3							
E,3	46.7	40.7	-6.0							
E,4	51.2	42.5	-8.7							
E,5	51.0	44.3	-6.7							
E,6	44.6	40.2	-4.4							
E,9	43.1	41.2	-1.9							
E,10	43.1	37.7	-5.4							
E,11	46.1	36.2	-9.9							
-,	70.1	30.2	0.0							


Area 1 January 1 through December 31, 2011									
Grid Points	IGA Annual Leg (24)	Calculated Leq (24)	Difference Leq						
C,4	44.2	36.6	-7.6						
C,5	36.7	34.9	-1.9						
C,6	36.0	34.0	-2.0						
D,4	41.1	36.0	-5.1						
D,5	34.2	34.9	0.7						
D,6	36.0	34.7	-1.4						
D,7	41.4	35.2	-6.2						
E,4	38.3	35.3	-3.0						
E,5	34.8	35.1	0.3						
E,6	36.7	34.0	-2.7						
E,7	41.4	33.8	-7.6						
F,2	51.7	39.6	-12.1						
F,3	43.7	36.9	-6.8						
F,5	37.3	33.6	-3.7						
F,6	38.5	33.4	-5.1						
F,7	42.1	33.7	-8.5						
G,2	51.2	40.5	-10.7						
G,3	42.1	36.4	-5.7						
G,4	40.2	34.3	-5.9						
H,2	50.1	41.2	-8.9						
H,3	46.0	36.2	-9.8						
H,4	46.1	34.7	-11.4						

Area 3									
January 1 through December 31, 2011									
Grid	IGA Annual	Calculated	Difference Leq						
Points	Leq (24)	Leq (24)							
A,-1	38.9	32.7	-6.3						
A,0	39.6	32.9	-6.7						
A,1	43.2	33.6	-9.6						
A,2	45.7	34.7	-11.1						
A,3	45.6	36.0	-9.6						
B,-1	37.9	32.7	-5.2						
B,0	39.2	33.0	-6.2						
B,1	42.6	33.5	-9.1						
B,2	45.8	34.4	-11.4						
B,3	45.7	35.5	-10.2						
C,-1	36.7	33.2	-3.5						
C,0	37.1	33.2	-3.9						
C,1	39.5	33.5	-6.0						
C,2	44.8	34.2	-10.6						
C,3	46.5	35.1	-11.4						
D,-1	32.6	33.3	0.6						
D,0	33.3	32.9	-0.4						
D,1	37.3	33.0	-4.3						
D,2	43.0	33.2	-9.8						
E,-1	31.4	33.0	1.6						
E,0	33.1	32.3	-0.8						
E,1	36.2	32.5	-3.7						
E,2	40.6	33.2	-7.4						
F,1	36.5	33.2	-3.3						
F,2	39.4	34.0	-5.4						
G,1	42.5	33.9	-8.6						

## **DEN Complaint and Operational Statistics**

#### 2011 Noise Complaint Calls by Community\*


#### **Total Calls by Community**

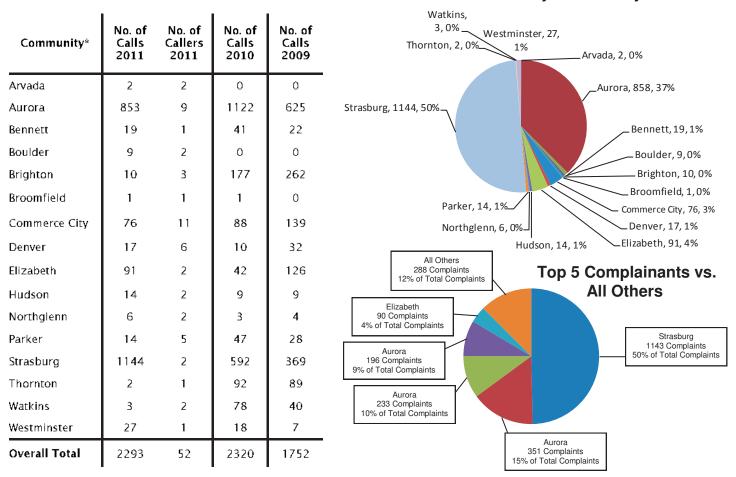


#### Monthly Comparison: 2011 Noise Complaint Calls - Daytime vs. Nighttime

Time Complaint Received	January	February	March	April	May	June	July	August	September	October	November	December	2011 Total
Day Hours (7:00 am to 9:59 pm)	163	94	229	181	188	165	199	148	188	164	149	116	1984
Night Hours (10:00 pm to 6:59 am)	15	28	27	16	21	17	39	52	25	37	24	8	309
Total	178	122	256	197	209	182	238	200	213	201	173	124	2293


#### Monthly Comparison: 2010 Total Operations vs. 2011 Total Operations

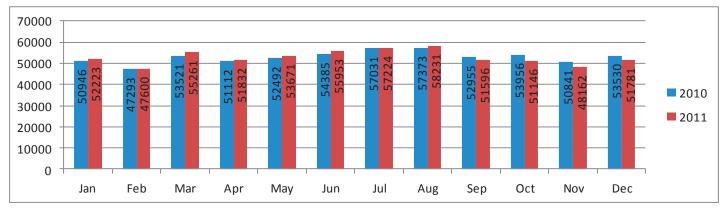



## **DEN Complaint Location Map**

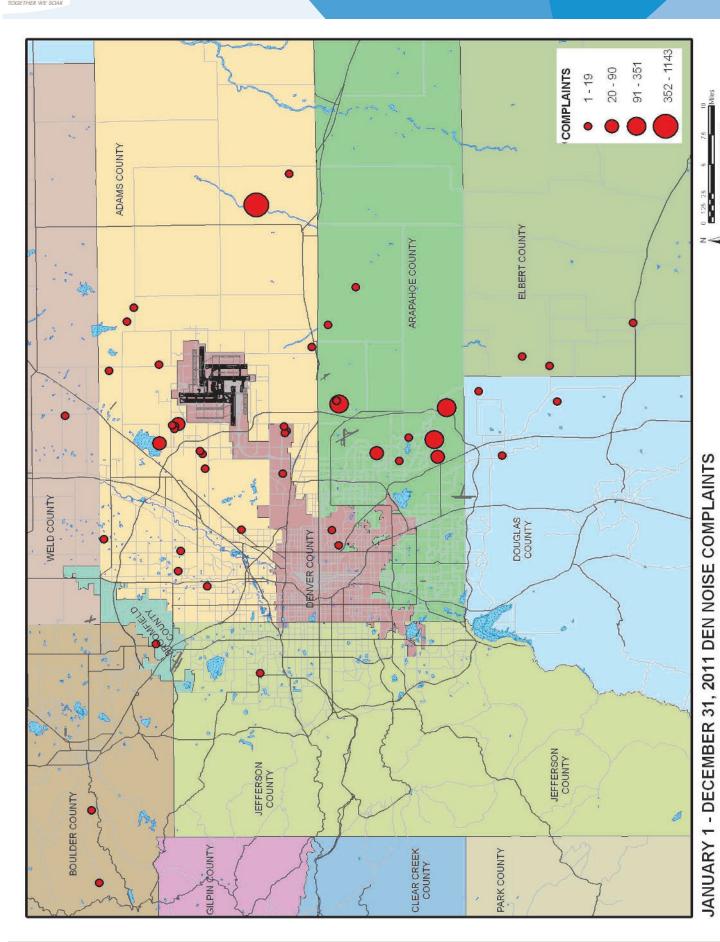



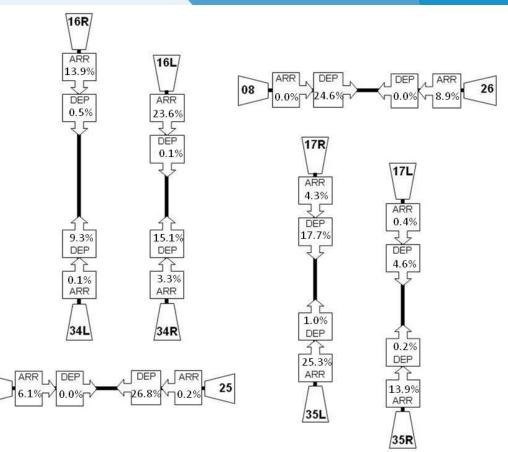

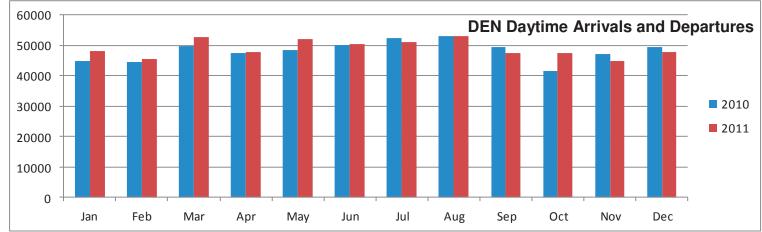

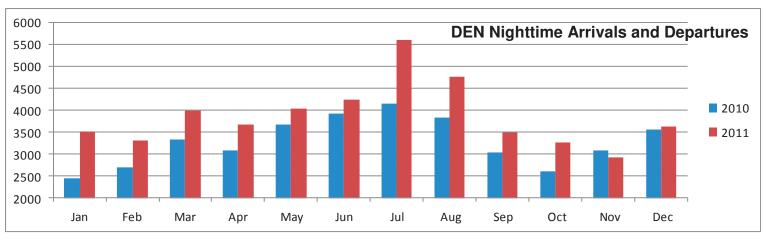



# WebTrak Flight Tracking, Noise and Complaint Information System

WebTrak is a system that allows citizens to watch the movement of flights and air traffic patterns within the greater Denver region. This flight tracking system includes specific information about flights from DEN, Centennial Airport (APA), Rocky Mountain Metropolitan Airport (BJC), and Buckley Air Force Base (BKF), as well as information on air traffic transitioning through the

Denver region. Information shown includes the aircraft's type, altitude, origin/destination airports, and flight identification. Visit WebTrak <a href="http://webtrak.bksv.com/den">http://webtrak.bksv.com/den</a>.

Real time and historical flight data and aircraft radar data originate from the Federal Aviation Administration (FAA) ARTS radar system at the Denver TRACON facility in Denver. The ARTS data is downloaded and processed by DEN's Airport Noise and Operations Monitoring System (ANOMS).

Real time data is viewed in the Live Mode and is delayed approximately 21 minutes for aviation security reasons and for system processing. Noise data from 27 permanent noise monitoring terminals (NMTs) located in the vicinity of DEN are available only in the Replay Mode for the previous day (s). Historical flight and noise data is viewed in the Replay Mode and is available up to 60 days in the past.

# NEED MORE INFORMATION?



Visit <u>business.flydenver.com</u> for more information regarding DIA's Noise Abatement Program.

There you will find very helpful information including; FAQs,

Annual Reports, land use maps and much more.

DEN Noise Office AOB, 6th fl, NW Corner 8500 Peňa Boulevard Denver, CO 80249-6340 303.342.2000 ph 303.342.2366 fax 303.342.2380 hotline 800.417.2988 toll free hotline business.flydenver.com